




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : H04N 7/08, 5/445		A1	(11) International Publication Number: WO 98/57497
			(43) International Publication Date: 17 December 1998 (17.12.98)
(21) International Application Number: PCT/IB98/00877		(81) Designated States: JP, US, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).	
(22) International Filing Date: 5 June 1998 (05.06.98)			
(30) Priority Data: 9/169529 11 June 1997 (11.06.97) JP		Published With international search report.	
(71) Applicant (for all designated States except US): KONINKLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).			
(71) Applicant (for SE only): PHILIPS AB [SE/SE]; Kottbygatan 7, Kista, S-164 85 Stockholm (SE).			
(72) Inventors; and			
(75) Inventors/Applicants (for US only): SHIMAKAWA, Joji [JP/JP]; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). DE LANGE, Alphonsius, Anthonius, Jozef [NL/NL]; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). VAN GESTEL, Henricus, Antonius, Wilhelmus [NL/NL]; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).			
(74) Agent: SCHMITZ, Herman, J., R.; Internationaal Octrooibureau B.V., P.O. Box 220, NL-5600 AE Eindhoven (NL).			

(54) Title: METHOD OF CONTROLLING RECEPTION IN DATA BROADCAST RECEIVER

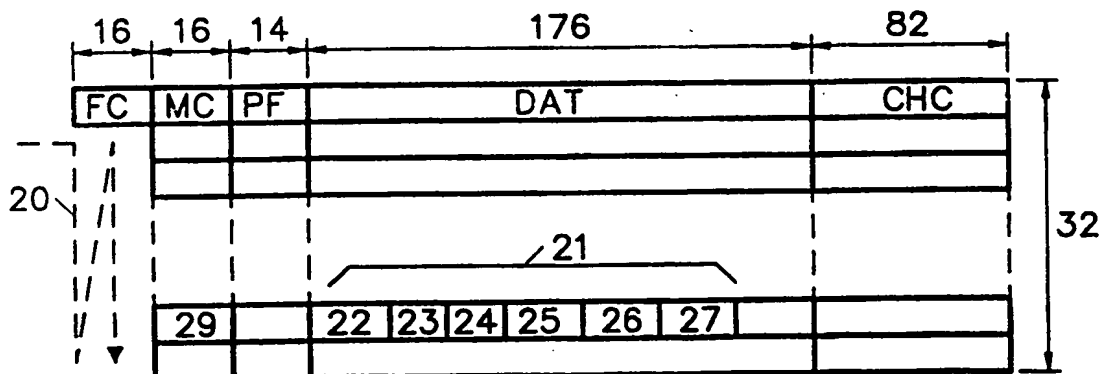

(57) Abstract

The invention relates to the reception of data by a data broadcast receiver, particularly a mobile data receiver for the Japanese TV data multibroadcast sound subcarrier system. The receiver is controlled to receive a desired type of data, for example, weather forecasts, news, stock prices, etc. The invention provides the transmission of time information which specifies for each type of data when said data will be transmitted or retransmitted. This allows the receiver to enter a standby mode in which the power consumption is reduced. On or slightly before the specified time, the receiver switches on to receive, decode and display the desired data. The invention is also applicable in television receivers having the facility to receive electronic program guides (EPG) or other services. The receiver is informed about the time at which an updated version of the EPG can be expected. In order to reduce power consumption in the receiver's standby mode, the hardware for receiving the EPG is not activated until said specified instant of time.

RCA PF990072 -AN

CITED BY APPLICANT

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	EK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

CITED BY APPLICANT

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/IB 98/00877

Patent document cited in search report			Publication date	Patent family member(s)	Publication date
JP	8288873	A	01/11/96	NONE	
WO	9702702	A2	23/01/97	AU 5908996 A CA 2198895 A EP 0787407 A JP 10505731 T	05/02/97 23/01/97 06/08/97 02/06/98
US	5752201	A	12/05/98	CA 2194316 A	10/08/97
US	5636288	A	03/06/97	NONE	
EP	0358166	A2	14/03/90	CA 1301849 A DE 68916723 D,T JP 1892180 C JP 2072724 A JP 6016601 B KR 9608961 B US 5027428 A	26/05/92 23/02/95 07/12/94 13/03/90 02/03/94 10/07/96 25/06/91
WO	9427377	A1	24/11/94	AU 677338 B AU 6906894 A CN 1110886 A DK 2695 A FI 950110 A GB 2283643 A,B GB 9500614 D IT 1269744 B IT MI940927 D NO 950103 A SE 9404586 A SG 45279 A US 5568513 A US 5701329 A US 5715278 A	17/04/97 12/12/94 25/10/95 10/01/95 10/01/95 10/05/95 00/00/00 15/04/97 00/00/00 02/03/95 27/02/95 16/01/98 22/10/96 23/12/97 03/02/98

This Page Blank (uspto)

INTERNATIONAL SEARCH REPORT

International application No.

PCT/IB 98/00877

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0358166 A2 (SANYO ELECTRIC CO., LTD.), 14 March 1990 (14.03.90), see the whole document --	1-10
A	WO 9427377 A1 (ERICSSON GE MOBILE COMMUNICATIONS INC.), 24 November 1994 (24.11.94), abstract -- -----	1-10

INTERNATIONAL SEARCH REPORT

International application No.

PCT/IB 98/00877

A. CLASSIFICATION OF SUBJECT MATTER

IPC6: H04N 7/08, H04N 5/445

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	JP 8288873 A (CASIO COMPUT CO LTD), 1 November 1996 (01.11.96), abstract --	1-10
A	WO 9702702 A2 (PHILIPS ELECTRONICS N.V.), 23 January 1997 (23.01.97), abstract, operation of the transmitter (page 3:24 - 4:28) --	1-10
A,P	US 5752201 A (RAIMO KIVARI), 12 May 1998 (12.05.98), abstract --	1-10
A	US 5636288 A (MARC E. BONNEVILLE ET AL), 3 June 1997 (03.06.97), abstract, see "the summary of the invention" --	1-10

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "I" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

Date of mailing of the international search report

5 August 1998

11 -08- 1998

Name and mailing address of the ISA/
Swedish Patent Office
Box 5055, S-102 42 STOCKHOLM
Facsimile No. +46 8 666 02 86

Authorized officer

Rune Bengtsson
Telephone No. +46 8 782 25 00

Method of controlling reception in data broadcast receiver.

FIELD OF THE INVENTION

The present invention relates to a method of controlling reception in a data broadcast receiver which receives a data broadcast of which data is transmitted in a frame comprising a plurality of packets and is interleaved at a same bit position in each packet and transmitted. The invention also relates to a method of broadcasting data to such receivers.

5

BACKGROUND OF THE INVENTION

- A TV data broadcast system for enabling reception of a terrestrial data broadcast is currently being examined in Japan. The system allows data reception by mobile receivers and uses data signal subcarriers 4.5fH and 7.5fH (fH = 15.73kHz, the horizontal synchronizing pulse frequency) within a sound signal band of a television signal as the transmission path. The terrestrial data broadcast system provides programs such as:
- Electronic mail service;
 - News such as newspapers, magazines, TV programs and others;
 - Vacancy information of concerts, movies, restaurants, hotels and others;
 - 15 Information on time schedules, delays and vacancies of trains or buses;
 - Information on traffic jam, parking zones, gas stations, toilets, car shops and others;
 - Information on public facilities, hospitals, travel bureaus and others;
 - Information on shopping such as bargain sales and others;
 - Information on recreation and pleasures such as horse races, bicycle races and others;
 - 20 Finance information such as stock prices and others;
 - Software such as MIDI data, games and others;
 - So-called narrow cast targeting on limited people in groups, companies, schools and others;
 - Information about disasters such as earthquakes, tidal waves, fires and others;
 - Play-by-play broadcasting of sports and others;
 - 25 Radio calling (pager).

However, the programs are not restricted to the above and it can be considered that the programs will be further diversified in the future.

In the TV data broadcast system, the data is transmitted in the form of frames. One such a frame is shown in Fig. 1. The frame consists of total 9232 bits including a 16-bit framing code or frame-sync (FC) and 32 data packets each having 288 bits. One data packet is made up of a 16-bit mode control (MC), a 14-bit prefix (PF), 176-bit service data (DAT) and a
5 check code bit (CHC) for correcting errors.

In the TV data broadcast system, the data of all packets in the frame are interleaved with a depth of 32 in the vertical direction as shown by the dashed arrow 20 in Fig. 1. That is, after transmitting the frame-sync signal FC, the most significant bit of the MC in the first packet is sent first, then the most significant bit of the MC of the second packet, etc.. In
10 the same manner, the second bit in the MC of the first packet is transmitted after the most significant bit of the MC in the 32nd packet. It is therefore necessary to receive all the data of the frame to which respective packets belong in order to decode the data of each packet.

The 16-bit MC comprises five significant information bits and eleven error correction bits. Fig. 2 shows the information bits b1-b5 of the MC currently defined in the TV
15 data broadcast system, b1 being the most significant bit. Five broadcast services are defined at present.

In some of the above mentioned data broadcast programs, the program broadcasting time or reception enabled time is restricted. Operation of the receiver in the time other than the program broadcast time greatly consumes power, thereby leading to disadvantages in the receiver for mobile reception in particular. Manually operating the receiver is a
20 troublesome operation.

OBJECT AND SUMMARY OF THE INVENTION

It is an object of the present invention to provide, in the above-mentioned data
25 broadcast, when receiving a program whose broadcasting time or reception enabled times is restricted, a method for controlling reception of a data broadcast receiver which can automatically minimize the ON time of the receiver for receiving the program.

To this end, according to a first aspect of the invention, a method for controlling reception in a data broadcast receiver which receives a data broadcast of which data is
30 transmitted in a frame form consisting of a frame identification portion and a plurality of packets each consisting of at least a data portion and a broadcast identification portion transmitted prior to the data portion and of which data except for that of the frame identifica-

tion portion is interleaved at a same bit position of each packet and transmitted, is characterized in that,

under control of a control device, operations of the receiver are:

detecting a frame identification portion of a frame;

5 deinterleaving and decoding data in a broadcast identification portion when the frame synchronization has been acquired;

deinterleaving and decoding program identification data and time information data of reception control information included in a data portion when the decoded broadcast identification portion data has an identifier for identifying a reception control information

10 broadcast;

entering a standby mode until the time specified from the time information data based on the decoded predetermined program identification data and the associated time information data; and

entering a reception enabled mode when the specified time has come.

15 A second aspect of the invention is characterized in that the program identification data consists of program number data, service number data, broadcasting station identification data and/or broadcasting channel data, and the time information data consists of transmission time data, retransmission time data and/or intermittent transmission data.

20 A third aspect of the invention is characterized in that reception control of the receiver is carried out by gradually receiving the reception control information broadcast based on the category of program.

A fourth aspect of the invention is characterized in that if the receiver has identified the broadcast identification portion including an identifier of a time signal broadcast in a reception enabled mode, the receiver calibrates the time of an internal clock by using time
25 information included in the data portion of the associated packet.

A fifth aspect of the invention is characterized in that the receiver again enters the reception enabled mode slightly earlier than the specified time.

BRIEF DESCRIPTION OF THE DRAWINGS

30 Fig. 1 is a view showing the frame structure in a TV data multibroadcast sound subcarrier system in accordance with the invention.

Fig. 2 is a view showing the information bits defined in the MC in the TV data multibroadcast sound subcarrier system.

Fig. 3 is a block diagram showing an example of a receiver for receiving a data broadcast in the TV data multibroadcast sound subcarrier system.

5 Fig. 4 shows a data format for transmitting an electronic program guide in accordance with the invention.

Fig. 5 shows schematically a television receiver for receiving and presenting the electronic program guide EPG data which are shown in Fig. 4.

10 Fig. 6 shows a flowchart of operations which are carried out by a microprocessor which is shown in Fig. 5.

DESCRIPTION OF EMBODIMENTS

The method according to the present invention will now be explained in detail in connection with a method for controlling data reception in a receiver targeting on reception of
15 a program whose broadcasting time (or reception enabled time) is restricted.

As apparent from Fig. 2, in the TV data multibroadcast sound subcarrier system, five broadcasts are currently defined by respective MCs. According to the present invention, reception control information data is broadcast which specifies the broadcasting time of specific programs. As shown in Fig. 1, the reception control information data 21 is included in the data
20 portion DAT, and an identifier 29 for identifying the presence of reception control information data is assigned to the MC of the data packet.

Any pattern may be used for identifying the reception control information broadcast as long as the MC is different than the five bit patterns shown in Fig. 2. That is, the identifier may be "10111", "10100" and the like.

25 The reception control information data 21 comprises, for example, a program number 22 (e.g., 16 bits), a service number 23 (e.g., 8 bits), a broadcasting station identification 24 (e.g., 12 bits), a broadcasting channel 25 (e.g., 10 bits), a transmission time 26 (e.g., 24 bits), and a retransmission time 27 (e.g., 16 bits) for each program. The transmission time data 26 indicates the time at which the program is broadcast and the retransmission time data 27
30 indicates the time at which the program whose content is the same with that of the former program is retransmitted. A multiplicity of retransmission times, e.g., the specification of

retransmission time 1, retransmission time 2, etc., is possible. It is to be noted that the reception control information data for one program may be included in one data packet (DAT).

The present invention intends to perform the reception control of the receiver based on the reception control information obtained by the above-described reception control information broadcast. This control method will now be explained in detail.

Fig. 3 is a block diagram of an example of the receiver for receiving the data broadcast in the TV data multibroadcast sound subcarrier system. The receiver is provided with a tuner 2 for tuning a frequency of a sound signal in a television signal received through an antenna 1. To the tuner 2 an FM detecting portion 3 is connected for performing FM detection of the sound signal output. A filter portion 4 for obtaining data signal subcarriers 4.5fH and 7.5fH from the FM-detected signal is connected to the FM detection portion 3. In the TV data multibroadcast sound subcarrier system, the data signal subcarrier is subjected to QPSK modulation. In view hereof, a QPSK demodulating portion 5 for demodulating the subcarrier is connected to the filter portion 4. The QPSK demodulating portion 5 outputs frame data which has a frame configuration made up of a plurality of packets and is interleaved.

A framing portion 6 for detecting the framing code FC is connected to the QPSK demodulating portion 5 to establish the frame synchronization of the frame data. The framing portion 6 is a coincidence circuit having a timer and a comparator, and counts a number of bits of the frame, i.e., 9232 bits upon recognizing the FC. The framing portion 6 is configured to detect that the next FC is input thereto based on the count. To the framing portion 6 is connected a deinterleave portion 7 for canceling the interleave of the data of the frame. A decoding portion 8 for decoding data of each packet of the frame which was subjected to the interleave cancellation is connected to the deinterleave portion 8. The data decoded in the decoding portion 8 is supplied to an output 9 through a non-illustrated display apparatus or the like.

The operations of the tuner 2, the FM detecting portion 3, the filter portion 4, the QPSK demodulating portion 5, the framing portion 6, the deinterleave portion 7 and the decoding portion 8 are all controlled by a central processing unit (CPU) 10. A memory 11 and an internal clock 12 are further connected to the CPU 10. It is to be noted that a ROM 13 for storing information of the program identification data (the program number data, the service number data, the broadcasting station identification data, the broadcasting channel data and others) relating to a program receivable by the receiver is also connected to the CPU 10.

When the power supply of the receiver is turned on, the respective elements constituting the receiver are all turned on, and the receiver enters the frame FC detection mode under control of the CPU 10. That is, the framing portion 6 detects the FC of a given frame. In case of frame synchronization, the frame data is subjected to interleave cancellation in the deinterleave portion 7 and the mode control portion MC of the packet of the frame is decoded in the decoding portion 8. If the MC does not have the bit pattern which identifies the reception control information data, the decoding process is terminated and the respective elements remain in the ON state until the reception control information is received.

When the MC has the bit pattern for identifying the reception control information broadcast, the decoding portion 8 decodes the data portion DAT of the packet. A table of reception control information is now created in memory 11. The CPU 10 compares the table with program identification data information stored in the ROM 13 which identifies a program to be received. When transmission of the program to be received is confirmed in the table and the transmission time of this program is extracted from the table, the receiver enters the standby mode until this time comes. In this manner, the operation of each element constituting the receiver is suppressed to the necessary minimum.

It is to be noted that the CPU 10 continues to operate in a power save mode in order to monitor the internal clock 12. When the above-described time is confirmed by the internal clock 12, each element of the receiver is turned on again under control of the CPU 10 to receive the predetermined data broadcast program. The time for reactivating each element is preferably slightly earlier than the stored time.

If for some reason no program is received at the specified, the time at which the program is retransmitted is extracted from the retransmission time data in the associated reception control information data of the table so as to again try to receive the program. The operation of each element of the receiver is thus suppressed to a real minimum.

In this manner, the data broadcast reception of the receiver can be automatically controlled based on the reception control information, thereby achieving great reduction in the power consumption of the receiver.

It should further be noted that the reception control information data itself may be specified as a program, the program number identifying the reception control information broadcast. In this case, the transmission time and retransmission time(s) specify the next broadcasting time(s) of the reception control information data.

As another application, the data broadcast may include transmission of first reception control information identifying program categories as a first step, and second reception control information identifying a desired program among a plurality of programs in each category as a second step rather than individually identifying all the programs. In the first
5 reception control information, the program number data specifies the first reception control information broadcast, the service number specifies a category, and the transmission time specifies the transmission time of the second reception control information broadcast relating to this category. In the second reception control information, the service number specifies the second reception control information in a given category, the program number identifies the
10 program belonging to this category, and the transmission time specifies the transmission time of this program. Upon receiving the first reception control information broadcast, the receiver recognizes the transmission time of the second reception control information broadcast of a desired category from the service number data and the transmission time data in a desired reception control information data and enters the standby mode until the time comes. When the
15 second reception control information broadcast time reaches, the receiver is reactivated and confirms the transmission time of the desired program from the reception control information data obtained by the second reception control information broadcast, again entering the standby mode until this transmission time comes.

It is important that the time of the receiver's internal clock 12 is precise, and it
20 may be preferable that this time is calibrated by receiving a time signal broadcast when the receiver can receive a predetermined program. To this end, one MC pattern which is not equal to the identifier for reception control, for example, "10001" or "00001", may be assigned to a time signal broadcast which includes the current time in the data portion DAT of the packet.

As an alternative, the reception control information data may specify intermittent
25 transmission data which specifies a broadcasting interval of the program rather than at a given time, for example, each hour or each day. The operation of the receiver is then controlled at intervals specified by the intermittent transmission data.

Further, in case of a pay broadcast for example, a personal ID of a subscriber may be set for receiving the program according to circumstances. In case of such a program,
30 the reception control information data may include the data relating to the personal IDs.

The reception control information data may also include data relating to the end time of the program so that the receiver can again enter the standby mode based on the end time. In this case, the standby mode may continue until the associated retransmission time or

until the transmission time specified by the reception control information of a desired program after again receiving this information.

The invention is not only applicable to mobile data receivers. Reduction of power consumption is also desired in the standby state of mains-powered equipment. For example, television receivers are known which are arranged to receive an electronic program guide (EPG) which is transmitted in a teletext-like manner. The EPG is transmitted only once, or a few times at most, each day. To receive the EPG, the relevant processing circuitry (tuner, teletext decoder, data memory) must be operative, even if the TV receiver is not used for watching a program. It is expected that international regulations will prohibit a power consumption of more than 1 Watt in the TV receiver's off-state or standby-state in the near future. This is unfeasible with present hardware circuits, particularly the TV tuner.

In accordance with the invention, the broadcaster includes in the transmission of EPG (or other types of data) the clock time at which the next transmission will take place. The television receiver then activates the relevant circuitry on or just before the specified time. In other words, the receiver switches from a real standby-state (in which the processor and the TV's real-time clock are active only) into a "datacast-standby" state in which the tuner, teletext decoder and data memory are activated for as long as the transmission takes place. Only in this "datacast-standby" state, the power consumption exceeds 1 Watt. Needless to say that all these operations are carried out without any intervention of the user.

The broadcaster may further indicate whether the data transmission is a repetition of a previously transmitted EPG or includes new information. In the first case, the receiver may conclude that the EPG has already been stored, and immediately switch to the normal standby state to further reduce power consumption. In the second case, the broadcaster may indicate whether the EPG is an incremental or completely new update. An incremental update may identify to which part of a previously transmitted EPG the update relates. This allows the TV to erase that part in memory.

Fig. 4 shows an example of a transmission format of an electronic program guide 40. The guide includes a header 41, a section 42 comprising a plurality of program items constituting the guide, and an end-of-file (EOF) marker 43. The header includes an identifier 44 (EPG) which specifies that the data 42 represents an electronic program guide, a parameter 45 (CUR) denoting the current clock time, a parameter 46 (NXT) which specifies the time at which the data will be transmitted again, and a parameter 47 (TYP) which specifies whether the EPG is merely a repetition of a previously transmitted version or a full or partial update thereof.

The parameter 46 (NXT) may have various formats. It may specify the clock time at which the next transmission of the guide will take place ("tomorrow at 04.00 AM"), the time at which the guide will be transmitted cyclically ("each day at 04.00 AM and 01.00 PM"), or as an offset with respect to the current time ("this guide will be broadcast in 12 hours again").

5 Fig. 5 shows schematically a television receiver arranged to receive EPG data, and assemble the data from various channels so as to compose and display an overall TV guide covering all the channels that can be received or are desired by the user. The receiver comprises an antenna 50, a tuner 51, a video decoder 52, a display screen 53, a data decoder 54 (usually, a teletext decoder), a control circuit 55 in the form of a microprocessor, a remote control
10 receiver 56, a remote control transmitter 57, an EPG data memory 58, a real-time clock circuit 59, and a power supply 60.

 The tuner receives a broadcast TV signal and demodulates it to obtain a composite video and blanking (baseband) signal CVBS. The CVBS signal is processed (52) and displayed (53) in a further known manner. The CVBS signal is also applied to the teletext
15 decoder 54. The teletext decoder comprises a data slicer (not shown) to extract the digital signal which is embedded in the vertical blanking interval of the CVBS signal and applies said data to the microprocessor 55 through a communication bus 61. The teletext decoder 54 also comprises a display generator (not shown) which receives an image to be displayed from the microprocessor 55 through the same bus 61. The image to be displayed is fed to the display
20 screen 53 via the video processing circuit 52 as an On-Screen-Display signal OSD.

 It will be appreciated that all the circuits of the TV receiver receive a power supply voltage in a normal operation mode. As generally known, the microprocessor 55 and the remote control receiver 56 receiver a power supply voltage also in a regular standby mode so that the receiver can be turned on in response to a remote control command. The standby
25 power is further applied to the real-time clock 59 so that the microprocessor can read the current time in the standby mode.

 The power supply 60 in Fig. 5 generates a power supply voltage Vss for the tuner 51, the teletext decoder 54, and the data memory 58, in response to a power control signal PWR from the processor 55. It is this signal which distinguishes between the regular
30 standby mode as defined above and a "datacast standby" mode in which Vss is applied to the tuner 51, teletext decoder 54, and data memory 58.

 The operation of the receiver shown in Fig. 5 will now be described with reference to a flowchart of operations which is carried out by the microprocessor 55 and which

is shown in Fig. 6. It will be assumed that the receiver is in the regular standby state and has already earlier received an electronic program guide as shown in Fig. 4. The guide is stored in data memory 58. The clock time at which the EPG will be transmitted again (the parameter NXT in Fig. 4) has been copied from memory 58 (the memory itself cannot be accessed in this mode) into a register of processor 55.

In a step 60, the processor checks whether a remote control command is received. If that is the case, the TV is switched on (which includes applying the power supply voltage Vss to the relevant circuits) in a step 61 and operates in a further known manner. In a step 62, the processor compares the current time T provided by the real-time clock circuit 59 with the time NXT at which the EPG is to be transmitted. As long as there is a predetermined large period of time to lapse until the EPG will be transmitted (e.g. more than half an hour), the processor returns to the step 60 already described above. In this manner, the TV remains in the normal standby state unless the receiver is turned on by the user.

If it has been found in the step 62 that an EPG transmission is due to be received, a step 63 is performed in which the microprocessor activates the power signal Vss so as to apply power to the tuner, teletext decoder and data memory (or, if the receiver was in the normal operation mode, to maintain supply of power even if the user switches the TV off). The TV is now in the "datacast standby" state. In a step 64, the EPG data is acquired and stored in the data memory 58. The parameter TYP (47 in Fig. 4) is hereby interpreted so as to distinguish which part of the already stored data is updated and can be removed from the memory.

Then, in a step 65, it is determined whether all transmitted EPG information has been processed. This is the case when the end-of-file marker EOF (43 in Fig. 4) has been encountered, or when the TYP parameter identifies that the received guide is the same as a previously transmitted and already stored version. As long as not all EPG information has been processed, the processor continues with said processing in the step 64. Otherwise, a step 66 is performed in which the next time of transmission (specified by NXT and meanwhile stored in the data memory) is copied into the processor's register, and in which the processor refrains from further applying the power supply voltage Vss to the tuner, teletext decoder and data memory by deactivating the power control signal PWR.

In summary, the invention relates to the reception of data by a data broadcast receiver, particularly a mobile data receiver for the Japanese TV data multibroadcast sound subcarrier system. The receiver is controlled to receive a desired type of data, for example, weather forecasts, news, stock prices, etc. The invention provides the transmission of time

information which specifies for each type of data when said data will be transmitted or retransmitted. This allows the receiver to enter a standby mode in which the power consumption is reduced. On or slightly before the specified time, the receiver switches on to receive, decode and display the desired data.

- 5 The invention is also applicable in television receivers having the facility to receive electronic program guides (EPG) or other services. The receiver is informed about the time at which an updated version of the EPG can be expected. In order to reduce power consumption in the receiver's standby mode, the hardware for receiving the EPG is not activated until said specified instant of time.

CLAIMS:

1. A method of controlling reception in a data broadcast receiver which receives data transmitted as frames comprising a frame identification portion (FC) and a plurality of packets each comprising at least a data portion (DAT) and a broadcast identification portion (MC),
- 5 characterized in that the method comprises the steps of:
- detecting the frame identification portion (FC) of a frame;
 - decoding data in the broadcast identification portion (MC) when the frame synchronization has been acquired;
 - decoding program identification data (?) and time information data included in
- 10 the data portion (DAT) when the decoded broadcast identification portion (MC) data identifies a reception control information broadcast;
- entering a standby mode until the time specified by the time information data associated with predetermined program identification data; and
 - entering a reception enabled mode when the specified time has come.
- 15
2. The method as claimed in claim 1, characterized in that the program identification data comprises program number data, service number data, broadcasting station identification data and/or broadcasting channel data, and the time information data comprises transmission time data, retransmission time data and/or intermittent transmission data.
- 20
3. The method as claimed in claim 1 or 2, further comprising the step of gradually receiving the reception control information broadcast based on a program category.
4. The method as claimed in claim 1, 2 or 3, further comprising the step of
- 25 calibrating the time of an internal clock by using a time signal included in the data portion of the associated packet.

5. The method as claimed in any one of claims 1 to 4, wherein the receiver enters the reception enabled mode slightly earlier than the specified time.

6. A television receiver for receiving television signals including data signals representing an electronic program guide (EPG), comprising:
5 receiving and decoding means (51, 54) for receiving and decoding said data signals;

a memory (58) for storing said data signals; and

processing means (55) for processing said data signals and presenting the

10 electronic program guide on a display screen (53);

a real-time clock circuit (59) for generating a current time (T);

characterized in that said processing means are adapted to receive a parameter (NXT)

identifying a next transmission time of said program guide, to compare the current time (T)

with said next transmission time, and to deactivate a power supply voltage (Vss) to the

15 receiving and decoding means in a standby state of the receiver until the current time (T)

substantially corresponds to the next transmission time.

7. The receiver as claimed in claim 6, wherein the processing means is further adapted to receive a parameter (TYP) indicating whether the data signals represent an
20 incremental or full update of a previously transmitted program guide, and to replace in said memory only the part of the guide corresponding with said update.

8. A method of broadcasting data to data broadcast receivers as frames comprising a frame identification portion (FC) and a plurality of packets each comprising at least a data
25 portion (DAT) and a broadcast identification portion (MC),
characterized in that the method comprises the steps of transmitting program identification data and time information data in the data portion (DAT) and identifying the transmission of said program identification and time information data by assigning a predetermined value to said broadcast identification portion (MC) data.

30

9. The method as claimed in claim 8, wherein said frames represent an electronic program guide (EPG).

10. The method as claimed in claim 9, wherein said frame includes a parameter (TYP) indicating whether the frame represents an incremental or full update of a previously transmitted program guide.

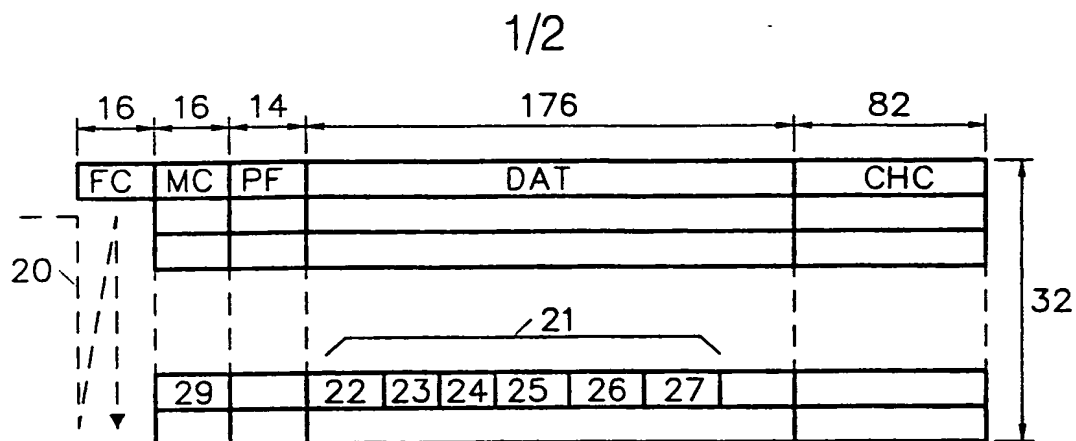


FIG. 1

b1	b2	b3	b4	b5	broadcast service
0	0	0	0	0	dummy
0	0	0	0	1	facsimile
1	0	0	0	1	facsimile (pay)
0	0	0	1	1	data
1	0	0	1	1	data (pay)

FIG. 2

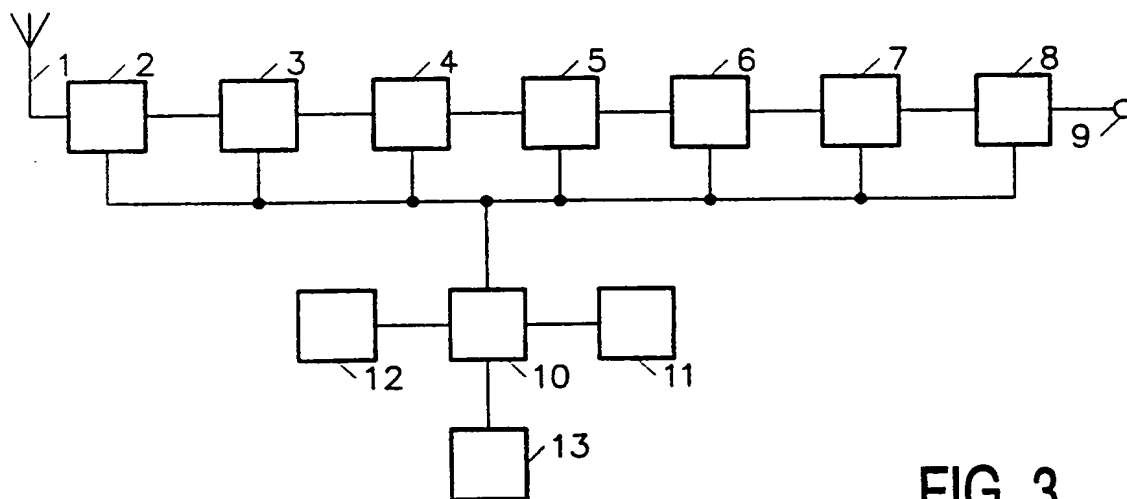


FIG. 3

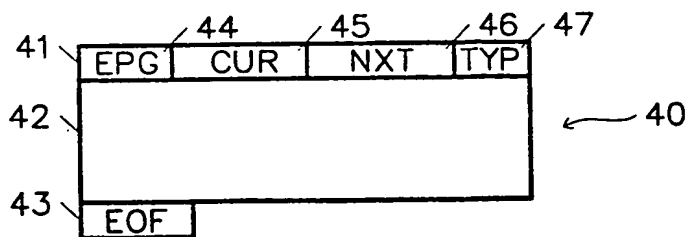


FIG. 4

2/2

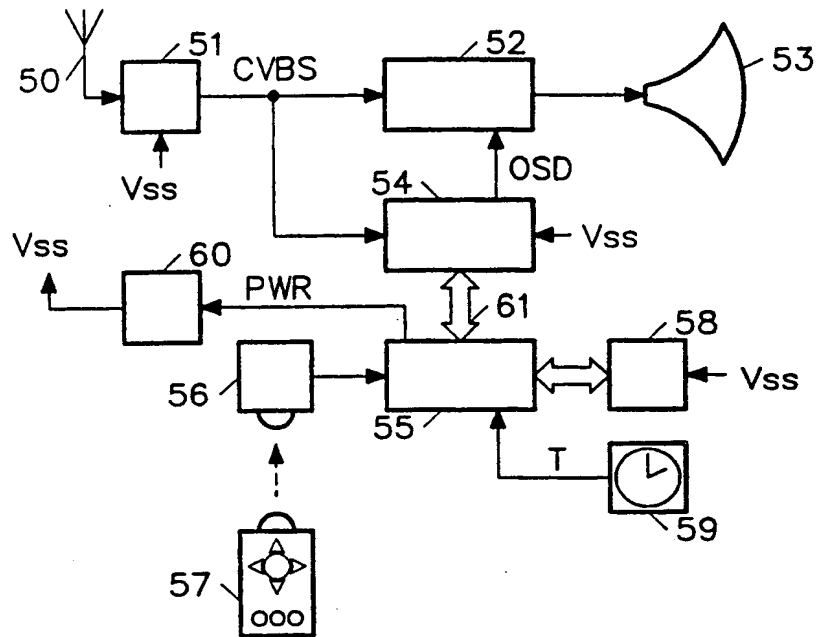


FIG. 5

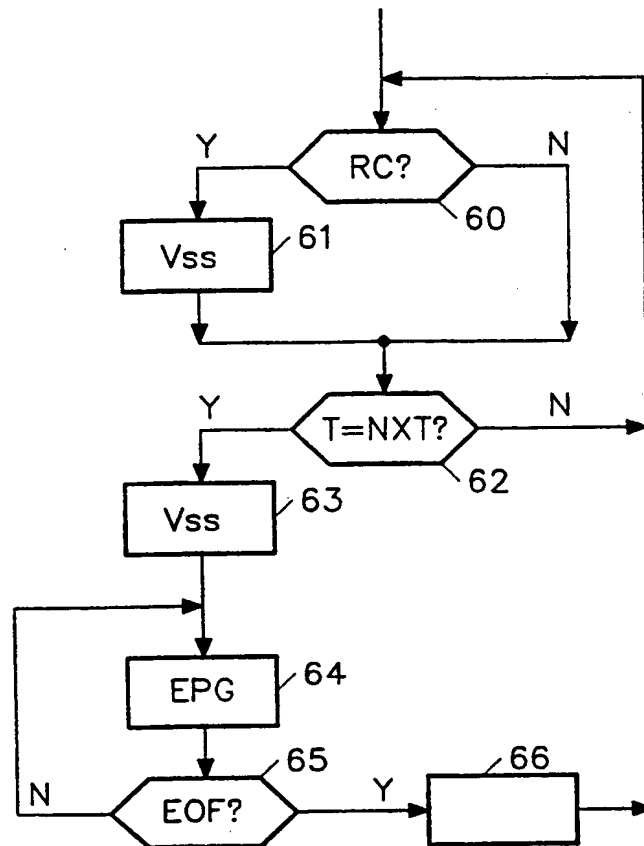


FIG. 6